

FIG. 1

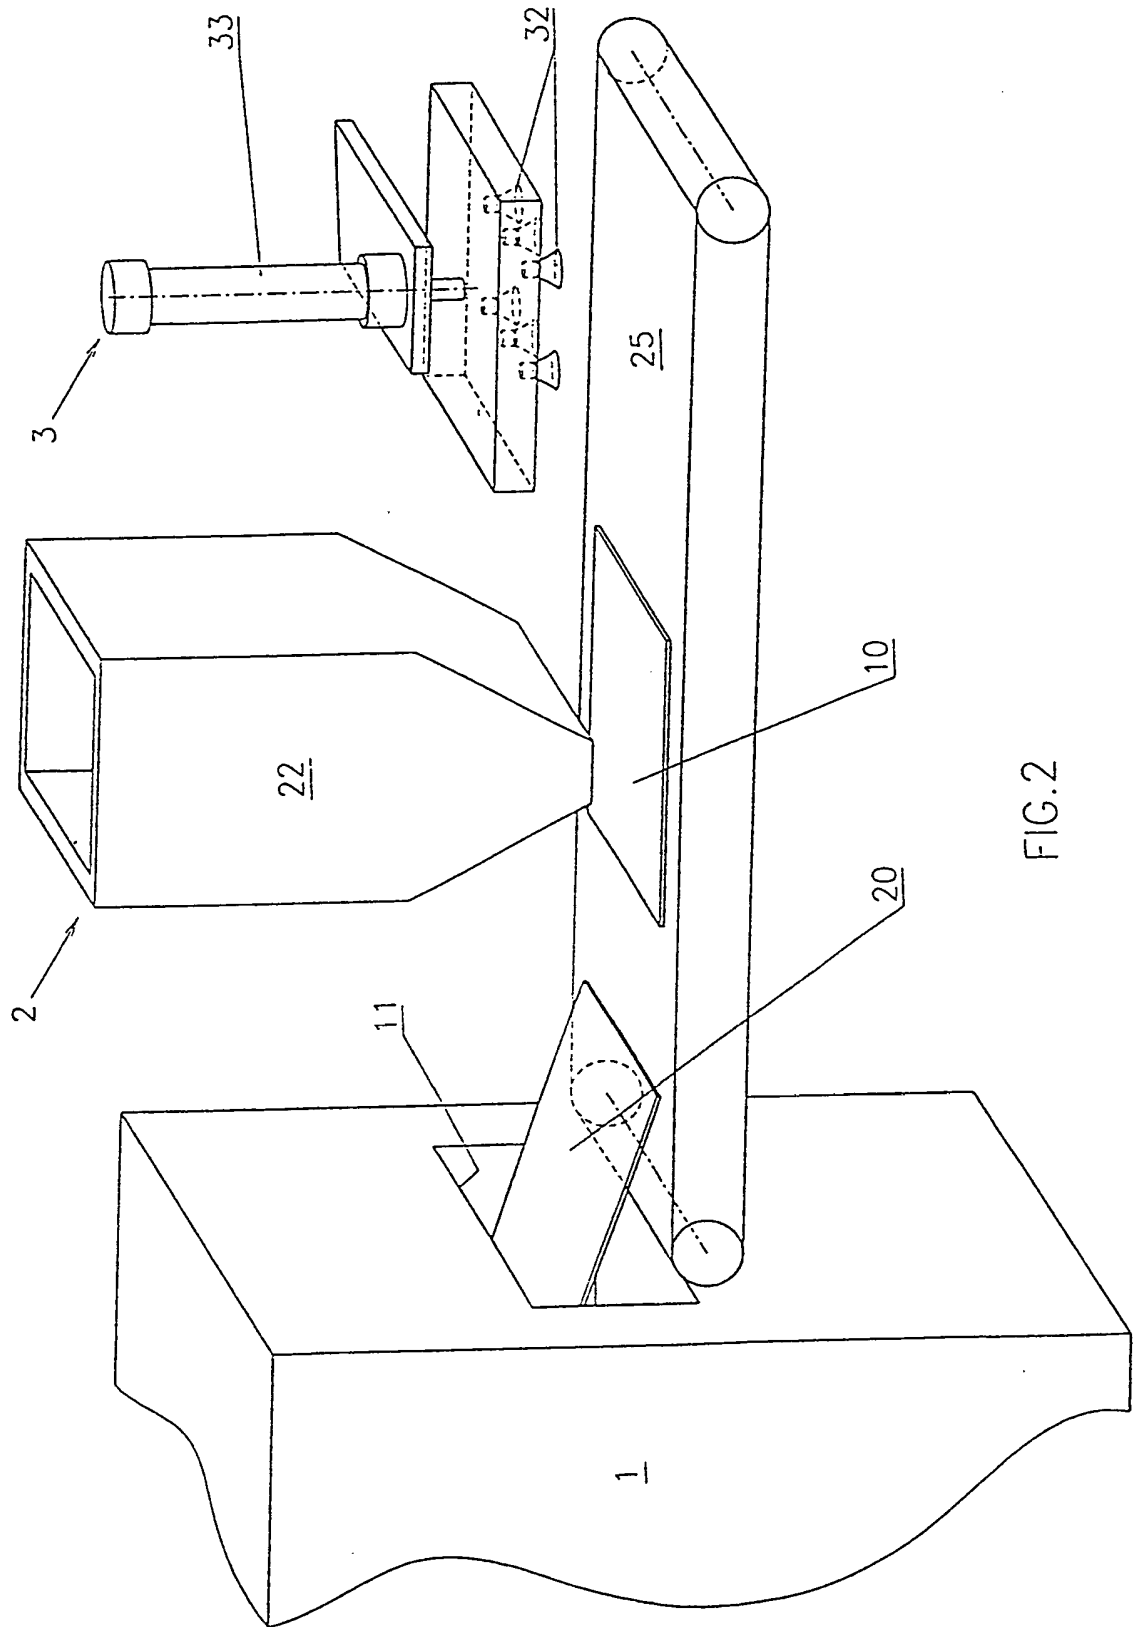


FIG. 2

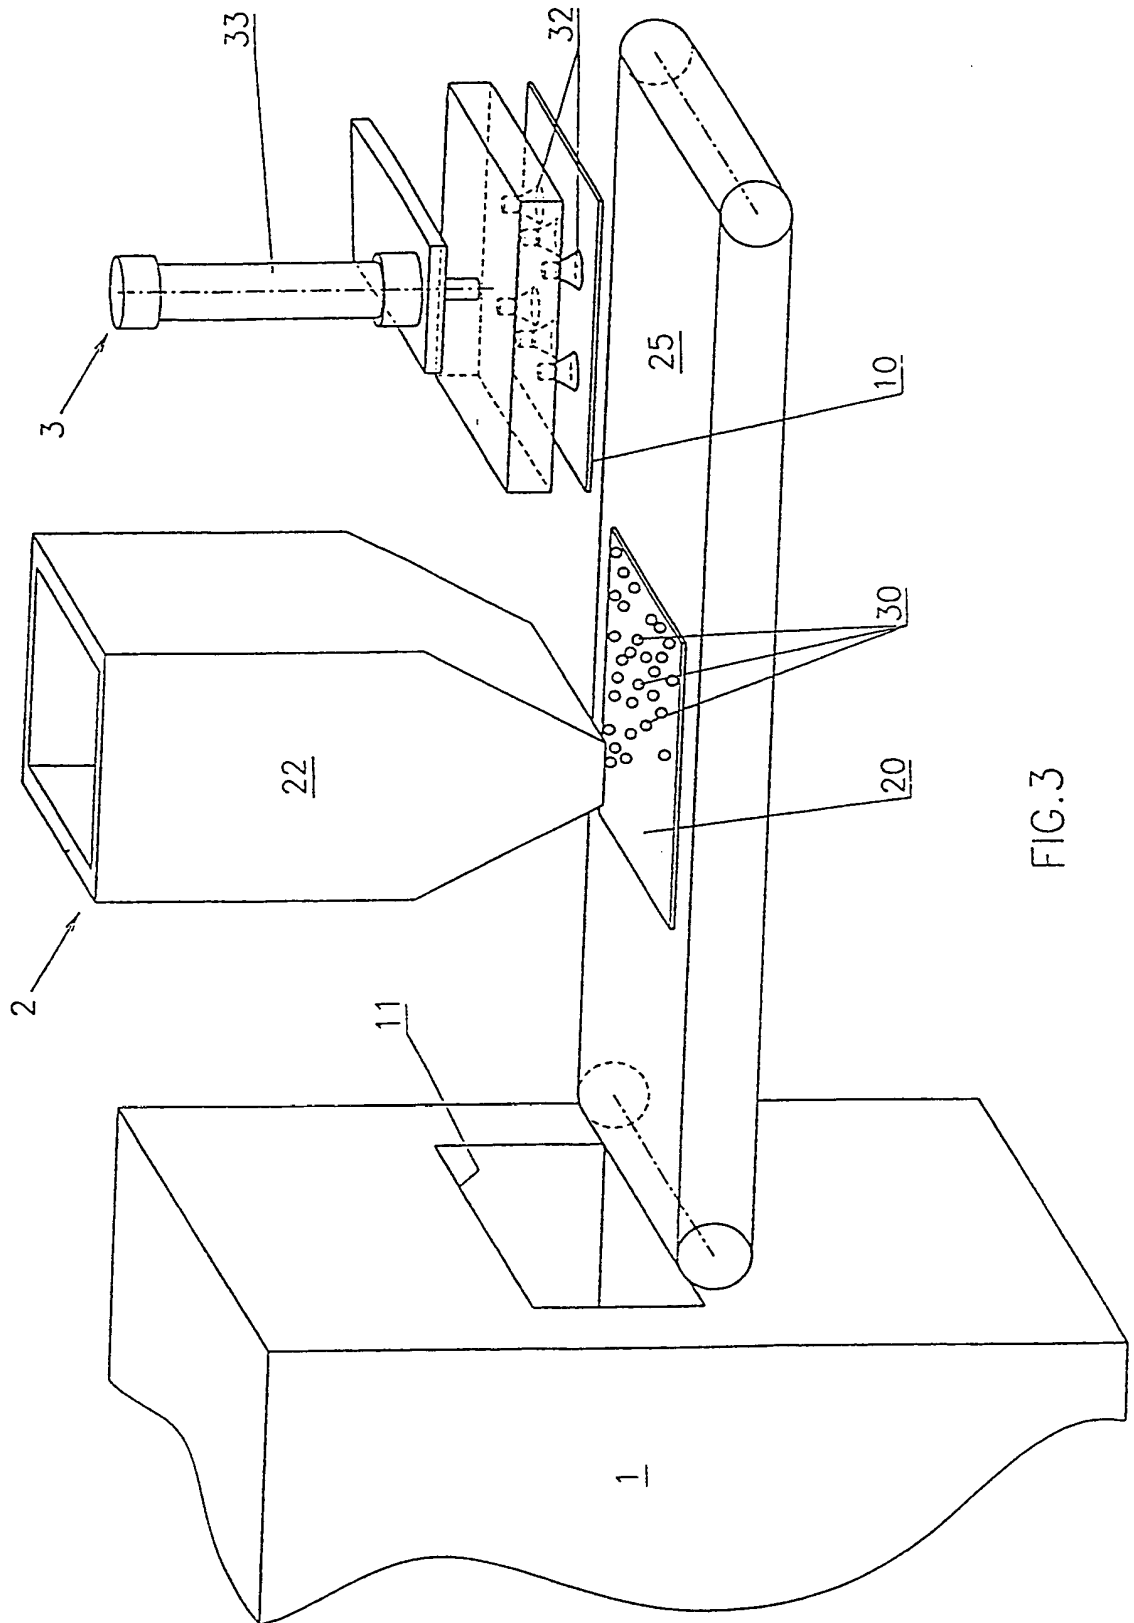


FIG. 3

FIG. 3 is a perspective view of a mechanical assembly. The assembly includes a large rectangular block (1) with a horizontal slot (11) on its top surface. A cylindrical component (10) is positioned within this slot. A vertical plate (20) is attached to the side of block (1) and features a series of small circular holes (30). A rectangular component (22) is positioned above the plate (20). A vertical rod (3) passes through a series of components: a cylindrical cap (33), a rectangular plate (32), and a rectangular block (25). The rod (3) is positioned to the right of the plate (20).

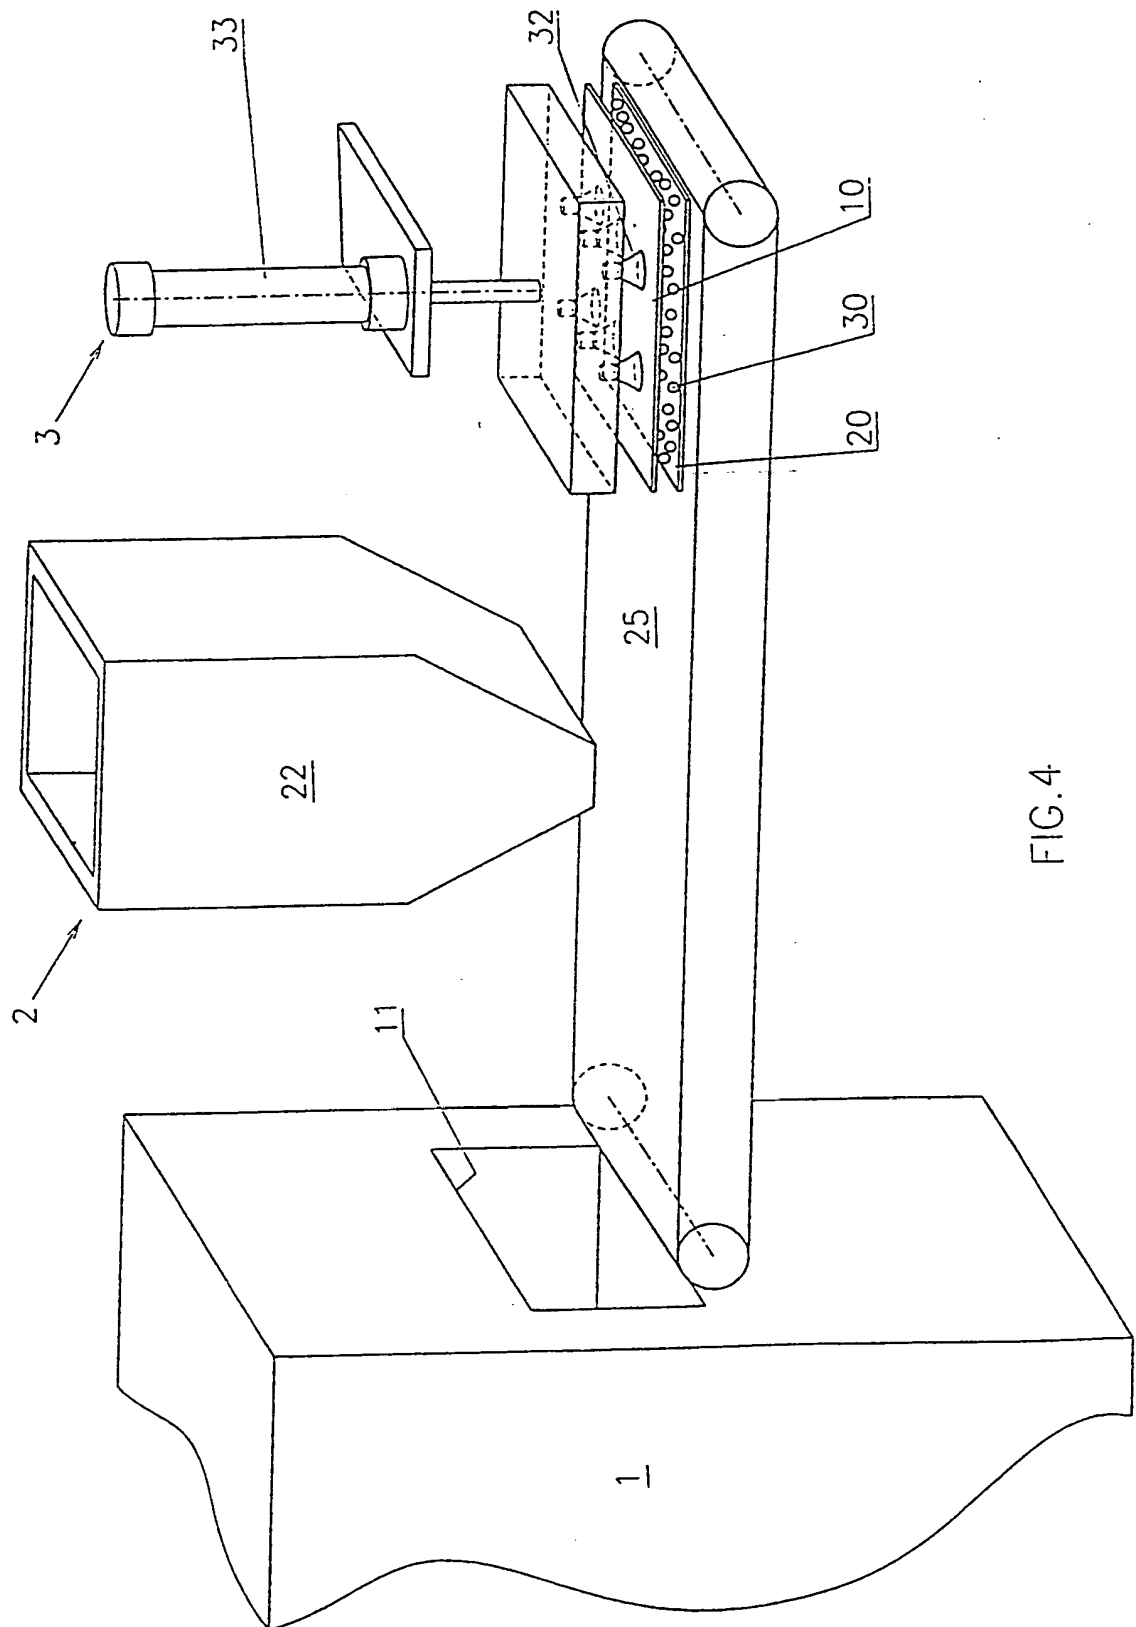


FIG. 4

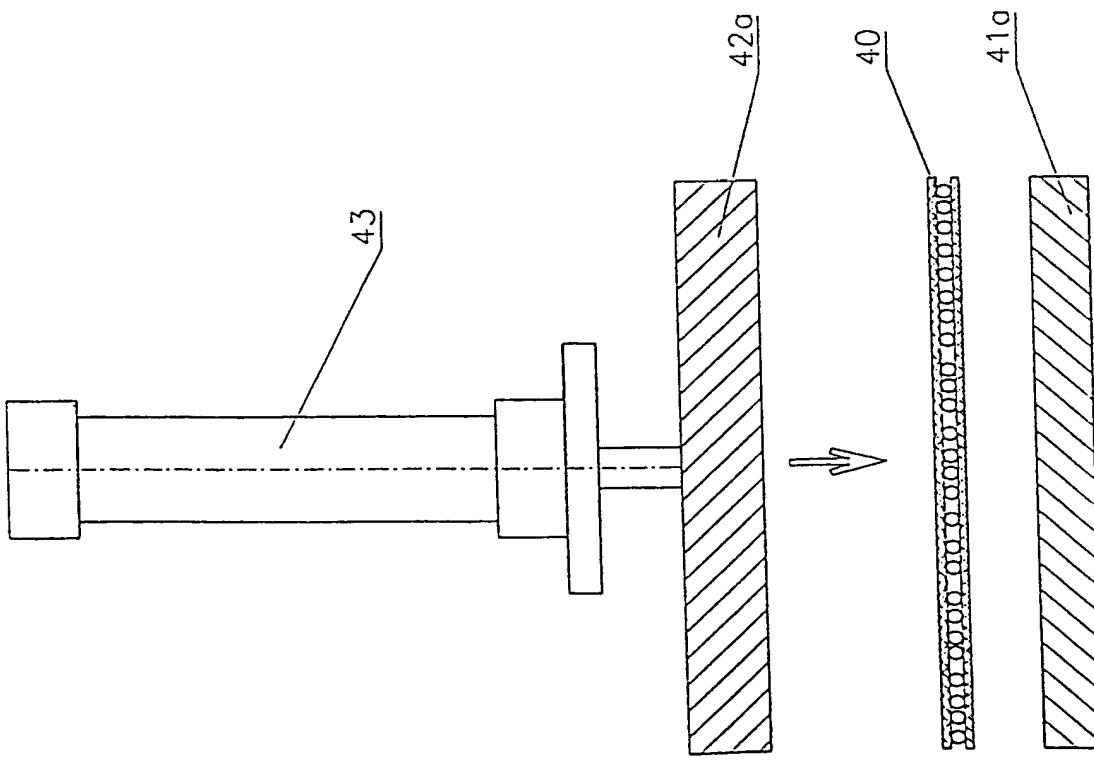


FIG. 5a

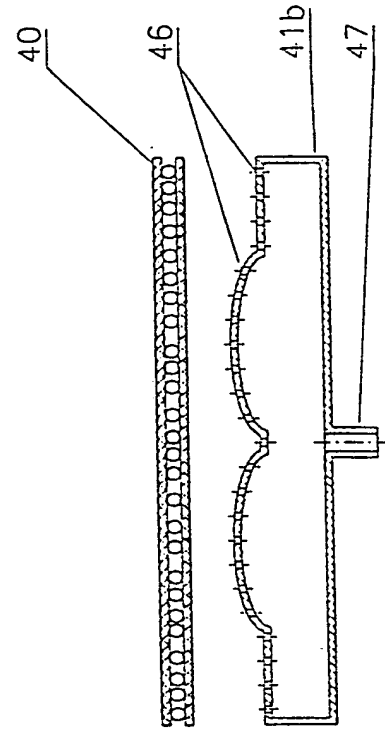


FIG. 5b

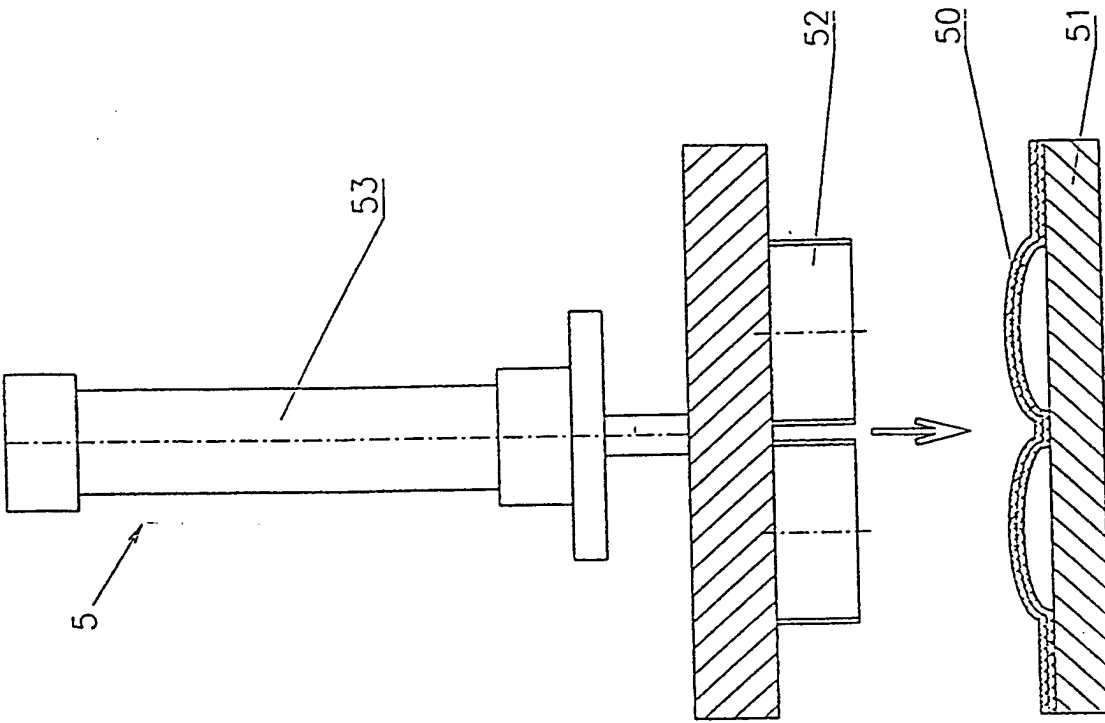


FIG. 6

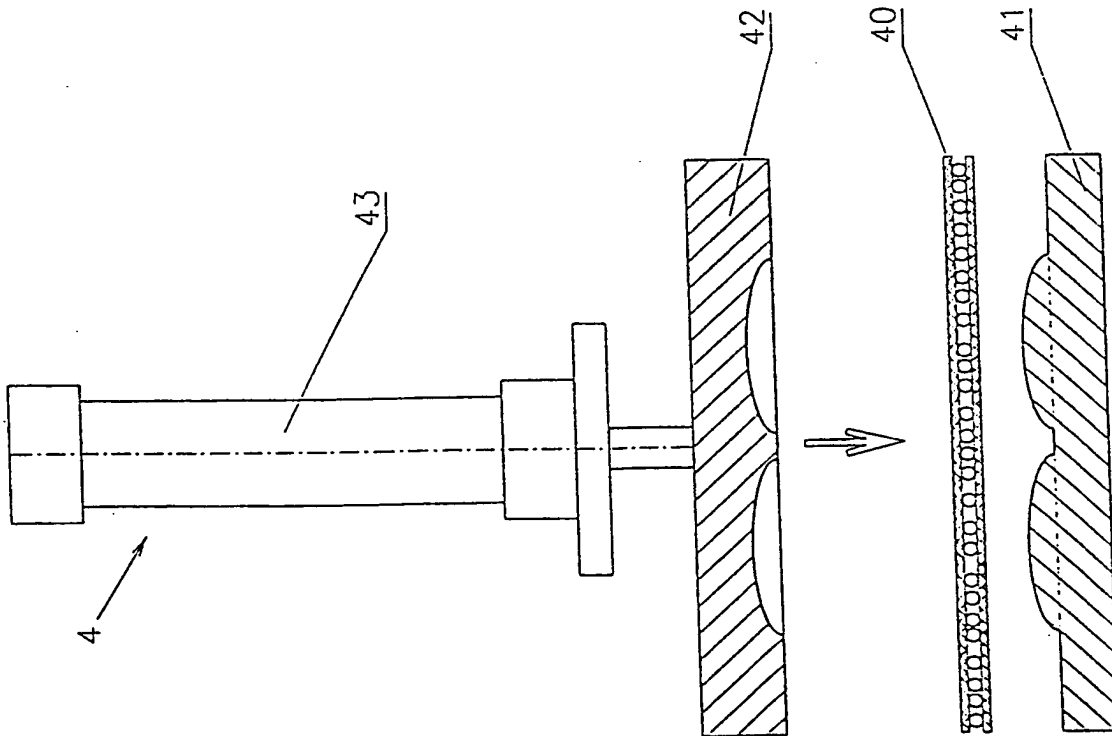


FIG. 5